

# Rack PDU

## Overview

The American Power Conversion (APC<sup>®</sup>) Power Distribution Unit (PDU) distributes power to devices in the rack.


**Outlets.** The PDU has fourteen (14) NEMA 5-15R outlets.

**Power cord.** The 12-foot (3.66-meter) power cord terminates with a NEMA L5-20P plug.

**Ground stud.** The 6-32 ground stud can be used to bond the unit to an enclosure.

**Circuit breaker.** When the button is raised, the circuit breaker has tripped and the PDU is overloaded, and at least one piece of equipment needs to be unplugged. The circuit breaker is rated to trip at the same overload as most office branch circuit protectors (20A).

## AP9551

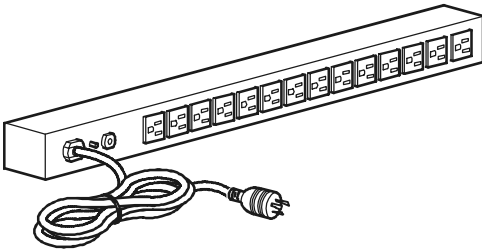

# Specifications for AP9551

---

## Electrical

---

Input connector	NEMA L5-20P plug
Output connectors	(14) NEMA 5-15R outlets
Nominal input voltage	120 VAC
Acceptable input voltage	± 10% of nominal voltage
Input frequency	50/60 Hz

---

## Physical

---

Dimensions (H × W × D)	24.40 × 1.75 × 1.75 in (61.97 × 4.44 × 4.44 cm)
Shipping Dimensions (H × W × D)	25.13 × 6.63 × 5.75 in (63.81 × 16.82 × 14.60 cm)
Weight	4.82lb (2.19kg)
Shipping weight	6.40lb (2.90kg)

---

## Environmental

---

Elevation (above MSL)	
Operating	0 – 10,000ft (0 – 3000m)
Storage	0 – 50,000ft (0 – 15 000m)
Temperature	
Operating	32 to 113°F (0 to 45°C)
Storage	-13 to 149°F (-25 to 65°C)
Humidity	
Operating	5 – 95% RH non-condensing
Storage	5 – 95% RH non-condensing

---

## Compliance

---

Safety	UL/cUL Recognized, UL 1363, CAN/C22.2 No. 21- M90
--------	---

---

