



APC Easy UPS 1 Ph Online Rack Mount Models

For IT professionals in small to medium businesses, EasyUPS Online provides basic power protection for unstable power conditions, ensuring consistent and reliable connectivity at the most critical moments. APC Easy UPS Online is a versatile, high quality, cost competitive UPS developed to handle a wide voltage range, and inconsistent power conditions; delivering the quality millions of IT professionals trust around the world. That's Certainty in a Connected World.



www.apc.com

Life Is 

APC[®]
by Schneider Electric

APC Easy UPS 1 Ph Online Rack Mount Models

Standard Features (1-10kVA)



ECO Mode / Green Mode

This is an energy saving mode and the input voltage regulation range can be set/ modified through the LCD display.

Generator Compatible

Ensures clean, uninterrupted power to the loads in the event of an extended power outage

High Power Factor

More real output power in watts 0.8 PF (1, 2, 3 kVA), PF = 1 (6 & 10 kVA)

Environmentally Robust

Conformal coated

Intelligent Battery Management

Maximizes battery performance, life, and reliability through intelligent precision temperature compensated charging.

OVCD (Overvoltage Cutoff Device) protection

Under special application with high voltage condition, OVCD protection will prevent the damage of UPS components and extend the life of the UPS

Input Power Factor Correction

(0.95 under normal input & fully loaded 1, 2, 3 kVA)
(0.99 under normal input & fully loaded 6 & 10 kVA)
Minimizes installation costs by enabling the use of smaller generators and cabling

USB Port / Serial Port

Provides management of the UPS via USB communication

Excellent Power Quality and Performance

True Double Conversion - provides tight voltage and frequency regulation and zero transfer time for reactive loads (machinery, lab equipment, etc.)

Wide input voltage range

Allow for unstable power environment

Built-in Automatic Bypass

Ensures seamless power to the load even in the event of catastrophic UPS failure

Power Conditioning

Protects connected loads from surges, spikes, lightning, and other power disturbances.

Flash Upgradeable Firmware

Allows for field updates of firmware via communication ports . (USB or RS 232)

LCD/LED Display

Intuitive interface provides detailed and accurate information with ability to configure locally.

Safety Agency Approved

Ensures the product has been tested and approved to work safely with the connected service provider equipment and within the specified environment

Built-in Automatic or Manual Bypass

Ensures seamless power to the load even in the event of catastrophic UPS failure


Extended runtime model is available on 6 & 10 kVA

Provides longer run time and flexibility in different scenario

Life Is On

APC[®]
by Schneider Electric

Easy UPS 1 Ph Online LCD Display

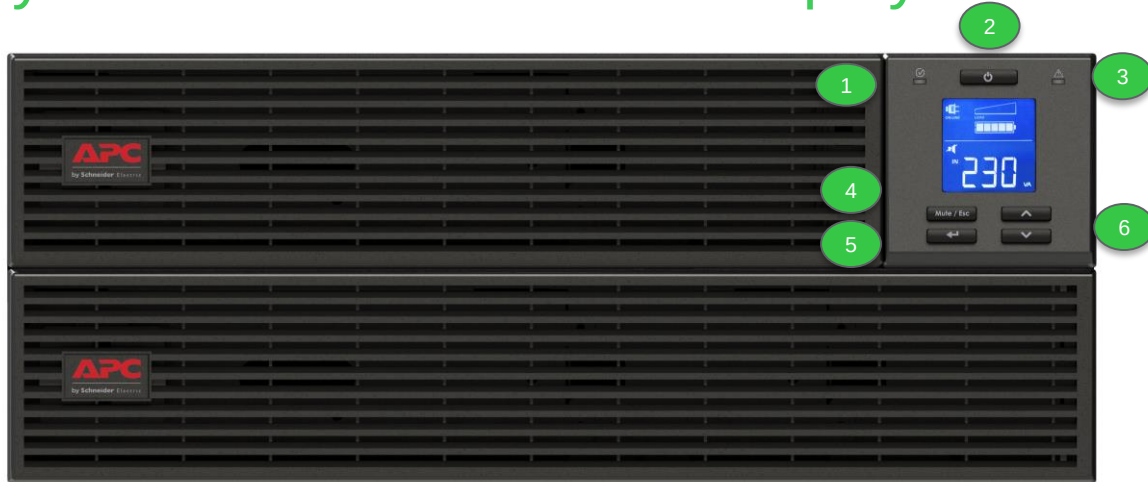

LCD Display

1. On/Off Status LED – Indicates power is ON
2. On/Off Button – Press to turn UPS On or OFF
3. Alert LED– Flashes red when UPS has a notification or is steady state when there is a fault
4. Mute/ESC button – Mutes current alarm temporarily and serves as the Escape key when in the sub menus of the display
5. Enter Key – Press to enter the display menus and choose an option within the menu
6. Up/Down Arrows – Navigation keys through the display menus.

LCD display icons



ON LINE

UPS is on utility power



ON BATT

UPS is on battery power



BYPASS

UPS is in bypass mode



ON BATT

Replace battery



ALARM

An internal fault is detected



Overload- connected load is drawing more than the power rating



LOW

Battery charge



LOAD SENSITIVITY

Load level



Mute- audible alarm has been disabled



ECO mode – illuminated when the unit is providing utility power directly and power is within configured ranges



SEE
MANUAL

Alert or notification – UPS has detected and error please see user's manual for details

**EVENT
LOG**

Event – illuminated when the user is reviewing the event log

Life Is On

APC
by Schneider Electric

APC Easy UPS Online Optional Accessories

Enable monitoring and control with an additional purchase

SNMP Card (APV9601)

APC SNMP Card provides direct communication with your APC Easy UPS.

At a glance the SNMP card monitors:

- UPS status: load, battery charge, voltage
- Battery status: healthy & capacity & runtime
- Environmental status: temperature & humidity
- Shutdown Wizard: ability to remotely shut down and reboot server



Dry Contact Card (VGL9901I)

UPS management accessory that provides two dry contact input and one relay output interface to APC Easy UPS SRV Series

Suitable with applications:

- IBM server, personal PC and workstations equipment
- Auto-controlled industrial equipment and communication applications



Life Is On

APC
by Schneider Electric

Easy UPS 1 Ph Online Rack Mount Models

Model		SRV1KRIRK-BR	SRV2KRIRK-BR	SRV3KRIRK-BR	SRV6KRIRK	SRV10KRIRK
Input	Input Voltage	220-240Vac				
	Input Connection	IEC C14	IEC C14	IEC C20	Terminal Block	
	Input Frequency	50 Hz / 60 Hz				
	Input Voltage Range (V)	110 Vac – 285 Vac @ 50% Load			110 Vac – 300 Vac ± 3% @ 60% Load	
	Power Factor	≥ 0.95			≥ 0.99	
Output	Topology	Online				
	Output Power Capacity (Watts)	800 W	1600 W	2400 W	6000 W	10000 W
	Output Power Capacity (VA)	1000 VA	2000 VA	3000 VA	6000 VA	10000 VA
	Output Voltage	220/230/240VAC				
	Frequency Range (Sync.mode)	50/60Hz +/- 3 Hz			50/60Hz +/- 4 Hz	
	AC Voltage Regulation	± 1%				
	Frequency Range (Batt. Mode)	50 Hz ± 0.5 Hz or 60Hz ± 0.5 Hz			50 Hz ± 0.1 Hz or 60Hz ± 0.1 Hz	
	Transfer Time (AC to DC)	Zero				
	Waveform Type	Pure Sinewave				
	Total Output Connections	(3) Brazilian outlet	(4) Brazilian outlet	(4) Brazilian outlet	Terminal Block	
	Efficiency (AC Mode)	88%			94%	
	Current Crest Ratio	3:1				
Battery	Battery Type	Maintenance-free sealed Lead-Acid battery				
	Typical Recharge Time	4 hours recover to 90% capacity			3 hours recover to 90% capacity	
Physical	Dimension, D X W X H (mm)	312x438x86 (2U)	462x438x86 (2U)	632x438x86 (2U)	UPS:612 x 438 x 88 (2U)	UPS:612 x 438 x 88 (2U)
					BATT:710x 438 x 88 (2U)	BATT:710 x 438 x 88 (2U)
	Weight (kgs)	11	18.2	27.6	UPS:14	UPS:16.5
BATT:46					BATT:53	
Features	LED	✓			✓	✓
	LCD	Load level, Battery level, AC mode, Battery mode, Bypass mode, and Fault indicators				
	EPO	X			✓	✓
	USB communication port	✓			✓	✓
	DB-9 RS-232	Supports Windows 2000/2003/XP/Vista/2008/7/8/10				
	Input Breaker	✓			✓	✓
	Battery user disconnect	✓			✓	✓
Protection	Surge Energy Rating (Joules)	600 J				
ENVIRONMENT	Humidity	0 to 95% relative humidity, noncondensing			0 to 95% relative humidity, noncondensing	
	Temperature	0° to 40°C at rated load			0° to 40°C at rated load	
	Noise Level	Less than 50dBA			Less than 55dB	Less than 58dB
Conformance	Regulatory Approvals	CE				

Life Is On

APC
by Schneider Electric